

Dunning 4 Light Island Pendant

6613304- 1.1

GENERATION LIGHTING

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

This product may be dimmed with a standard incandescent dimmer.


CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

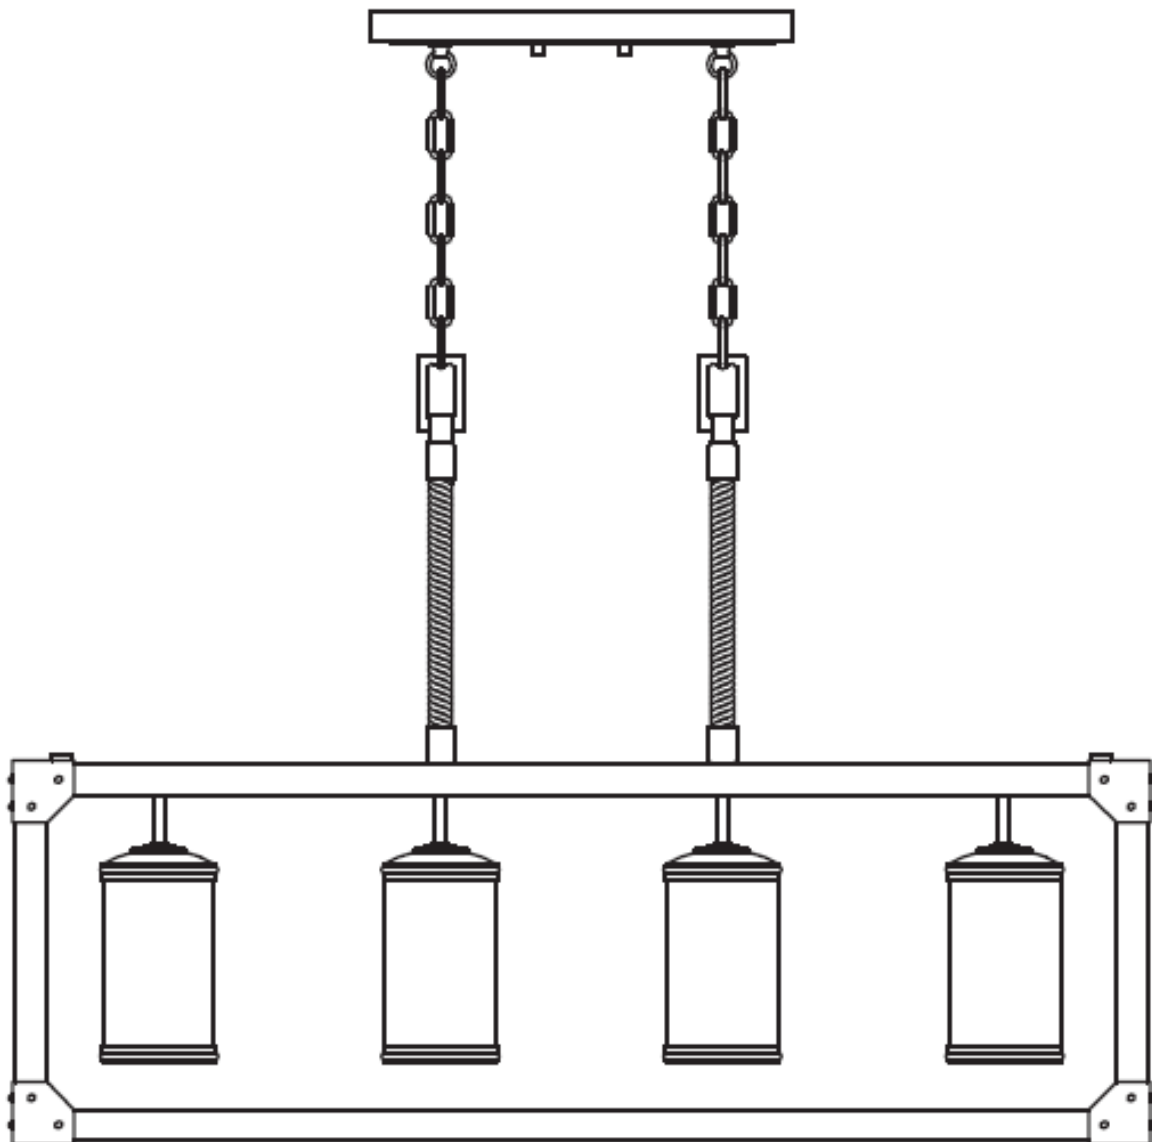

Install the Fixture

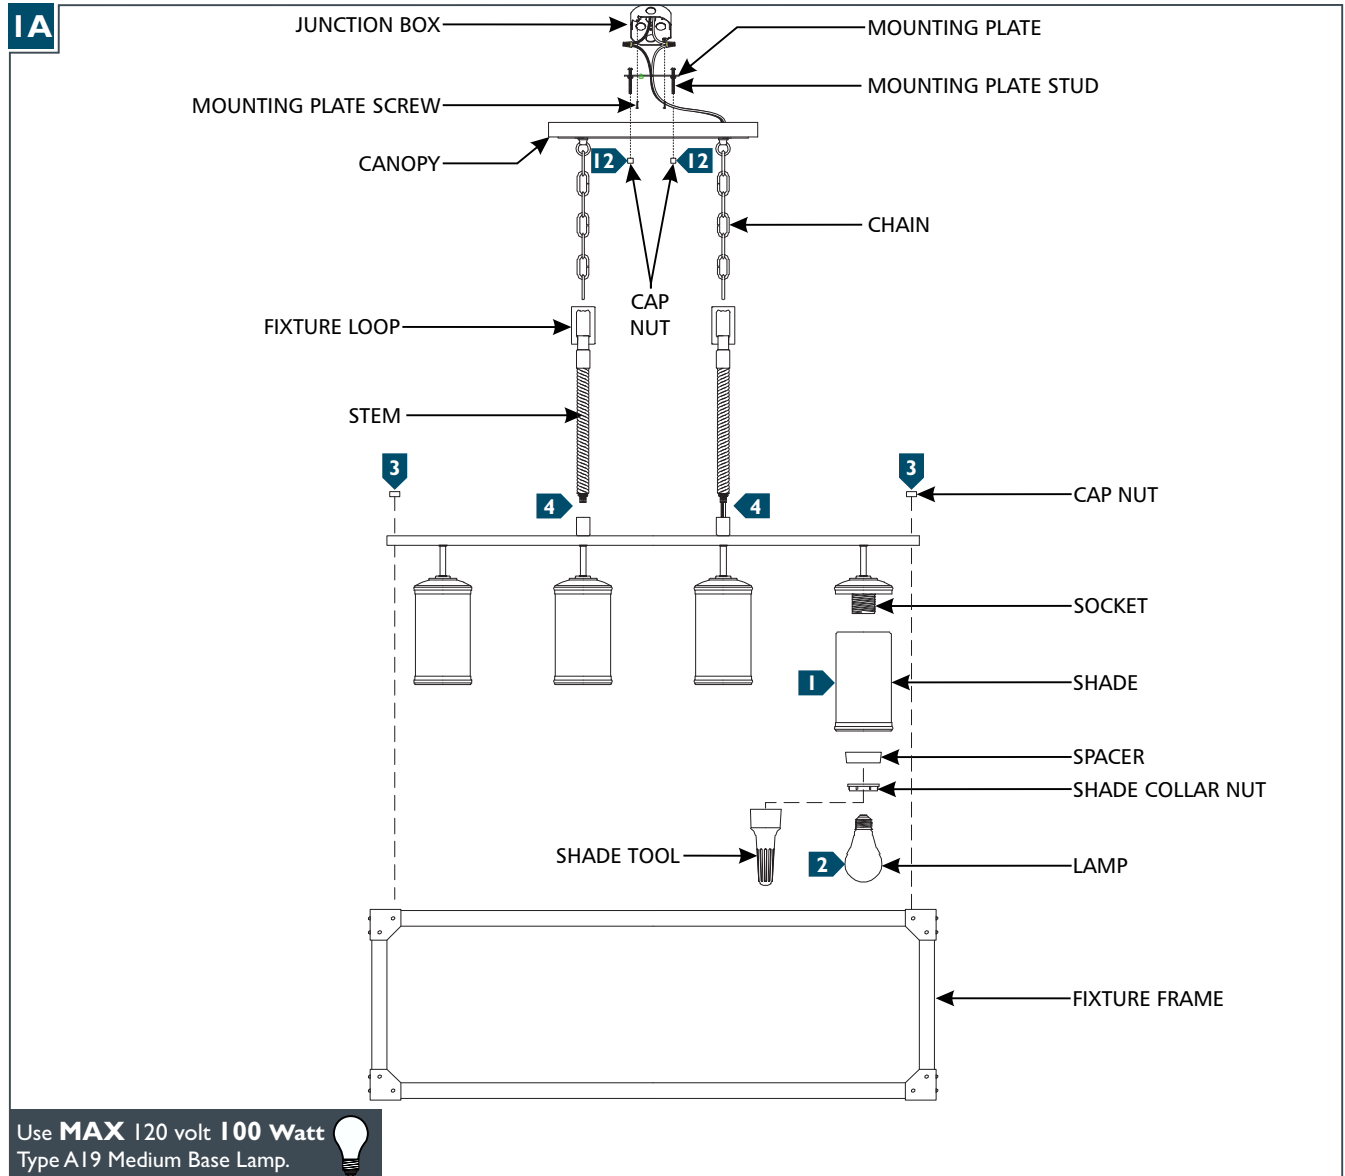

Use **MAX** 120 volt **100 Watt**
Type A19 Medium Base Lamp.

- 1** Place the shade and spacer onto the socket and secure them in place by screwing the shade collar nut onto the socket using the shade tool; repeat for remaining shades.
- 2** Screw the lamps into the sockets.
- 3** Place the fixture inside of the fixture frame and secure them together using the cap nuts.
- 4** Feed the cord through the stem, then screw both stems onto the top of the fixture.
- 5** Secure the mounting plate to the junction box with two mounting plate screws.
- 6** Open a link and install it to the fixture loop, then determine the wanted height of the fixture and remove a portion of the chain by opening a link and removing it from the bottom.
- 7** Install the open link onto the fixture loop and secure it in place by closing the link; repeat steps 6 and 7 for the other stem and chain.
- 8** Weave the cord through the chain, canopy, and out of the electrical box. Trim the cord leaving enough to make electrical connections.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the canopy onto the mounting plate studs, and secure it in place by screwing the cap nuts onto the mounting plate studs.